

FDW75C(2/12)N



WIRELESS OPTION (FD75C2/12NL)

- Plug and play!
No software or programming required.
- Package includes a NEMA enclosed receiver.
- Works with the following network cameras:
Axis, Canon, JVC, Panasonic, Elmo and Sony.
- Signal goes through walls, trees, and other foliage.
- 128-bit encryption provides secure data transfer. Every transmitter and receiver are matched pairs.
- Operates at 900MHz.
(Does not interfere with Wi-Fi networks.)
- FCC license not required to operate or install.
- Highest quality of service available; synchronous point to point protocol enables extremely low data latency and jitter.

PRODUCT FEATURES

- Integrated Wall Mount standard; Pendant Mount available (1½" pipe thread)
- Thermostatically controlled 12Vdc or 24Vac heater and surge protection
- Optically clear and durable polycarbonate lower dome
- Durable engineered plastic top, 94VO UV protected
- Universal mounting plate to accept IP network camera systems
- Available with integral pan/tilt
- Accepts one IP Network fixed camera - MCL 7.5"



FDW75(2/12)N FusionDome™ Series PRODUCT DESCRIPTION

The indoor and outdoor 7" FusionDome™ models offers versatility and camera protection in a compact size. It accepts analog camera systems from Canon & Elmo and many network cameras from Axis, Canon, Elmo, JVC, Panasonic and Sony or a single fixed camera with a maximum camera length of 7.5". On outdoor models a heater and blower are standard, and a cold weather kit is available to offer even wider temperature ranges.

OPTIONAL COMPONENTS AND ACCESSORIES:

| | | | | | | | |
|--|---|--|---|---|---|---|---|
|  |  |  |  |  |  |  |  |
| VDA11 (1) 11dBi high gain omni-directional antenna, includes wall mount bracket & 10" pigtail For Wireless Model FDW75C2NL | CWKFD2 24Vac Cold Weather Kit for an additional heater and blower For Outdoor FusionDomes in extremely cold weather | PRM30G Aluminum parapet mount bracket with 20" extension, includes 1½" NPT | PB24 Rugged cast aluminum power box with 84vA and 24vA power supply | WM20G Aluminum gooseneck wall bracket for all SuperDome™ and FusionDome™ housings, includes 1½" NPT | PS2496N NEMA 4x rated outdoor plastic enclosure, 115Vac input, 24Vac output: 1 Camera output - 1.1A 1 Heater output - 4A (96vA) | ACA2 Aluminum corner mount bracket with female inserts | WM30G Aluminum parapet mount bracket, includes 1½" NPT |


MODELS:

| FusionDome™ 7" | Heater/Blower | | | | | |
|----------------|---------------|-----------|-----|-------|-------|------------|
| | Wireless | IP Ready™ | PTZ | 24Vac | 12Vdc | Wall Mount |
| FDW75C2NL | ✓ | ✓ | ✓ | ✓ | | ✓ |
| FDW75C12NL | ✓ | ✓ | ✓ | | ✓ | ✓ |
| FDW75CF2N | | ✓ | | ✓ | | ✓ |
| FDW75C2N | | ✓ | ✓ | ✓ | | ✓ |
| FDW75C12N | | ✓ | ✓ | | ✓ | ✓ |
| IFDP75TF | | ✓ | | | | |
| IFDP75TN | | ✓ | ✓ | | | |

FusionDome™ MODEL NUMBER SYSTEM:

| F | D | W | 7 | 5 | C | 2 | N |
|------------------------|-----------------|------------------------------|---------------|----------------|----------------|------------------------------|---|
| Fusion Dome | Wall Mount | Dome with extended trim ring | Clear Dome | PTZ Camera | 24Vac Input | IP Ready Network | |
| IFD Indoor Fusion Dome | P Pendant Mount | 7 7" Dome | T Tinted Dome | F Fixed Camera | 12 12Vdc Input | NL Wireless IP Ready Network | |

FDW75C(2/12)N

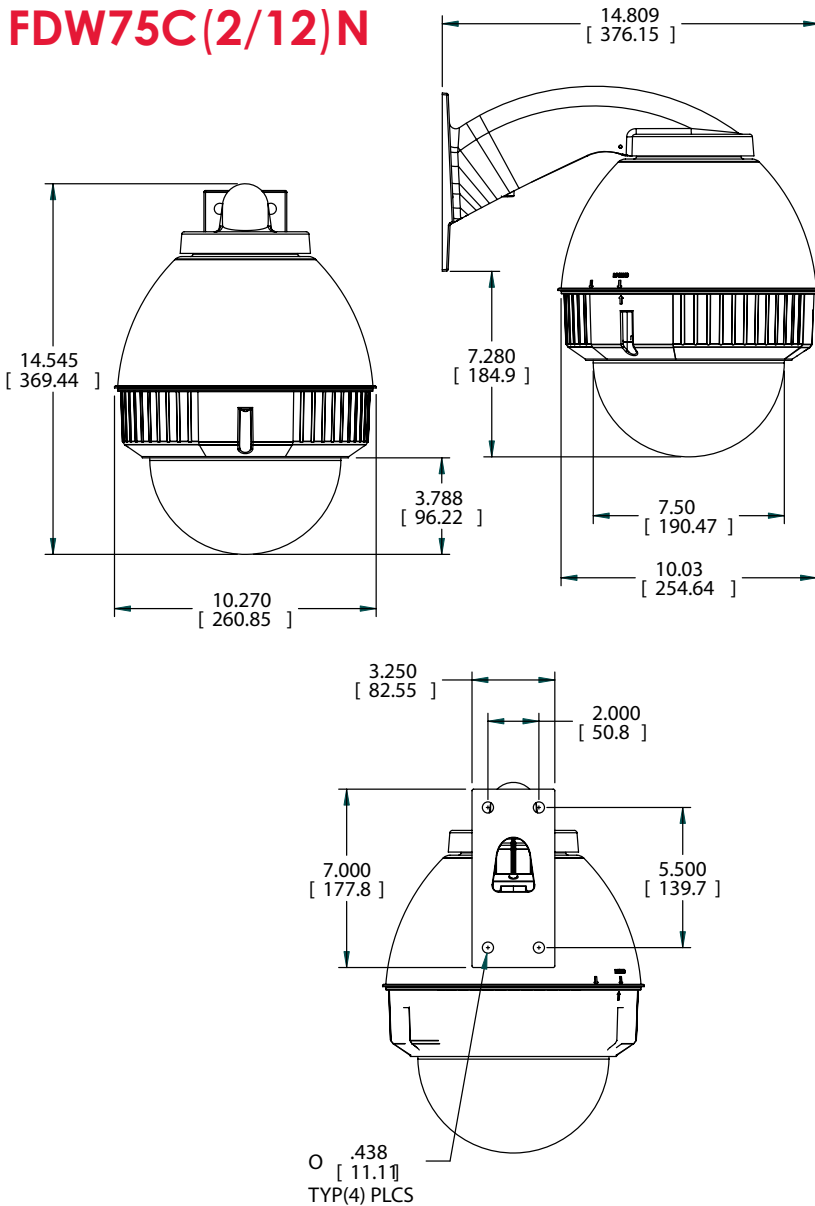

FDW75C(2/12)N FusionDome™ Series CERTIFICATIONS AND RATINGS



ARCHITECTURAL/ENGINEERING SPECIFICATIONS

For standard outdoor applications the camera shall be housed in an FDW75 enclosure, which is available in either wall or pendant mounted versions. Blowers and thermostatically controlled heaters shall be included. Outdoor units shall be a 24Vac input. The housing top shall be manufactured from high-impact engineered plastic, UV protected, with a UL flame rating of 94V0. The dome shall be made of optically clear injection molded polycarbonate, and shall be held in place with 3 captive fasteners. Both clear and tinted domes shall be available. A safety cable shall be provided to hold the dome while servicing. For outdoor models that support network cameras the input voltage is 24vac and the housing shall include 24vac to 12vdc power supply for the camera. For the JVC VN-C655U the output power to the camera is 18vdc.

Mechanical Specifications

| | |
|-------------------------------|---|
| Size: (Product/shipping) | 14.7" x 8.2" x 14.5" 374 x 208 x 369mm (h*w*d) |
| Weight: (Product/shipping) | 11 lbs/ 5kg |
| Construction Top: | 3mm engineered plastic |
| Dome: | Polycarbonate |
| Mount Bracket: | Machined & cast aluminum |

Environmental Specifications

| | |
|---------------------------------|---|
| Operating Temperature: | -20° F to + 120° F -20° C to + 15° C |
| Heater activates at | 60 °F (15° C) |
| Heater deactivates at | 80°F (27° C) |
| Effective Projected Area (EPA): | Approx. 0.12 m^2 |
| Operating Humidity: | Up to 100% |

Electrical Specifications

| | |
|-------------------|---|
| Power: | |
| Dome 24vac model: | 24vac 55watts (H/B 27 watts) |
| Dome 12vdc model: | 12vdc, 50 watts (includes 20 watts for heater) |

Wireless Device Specifications Option

| | |
|-----------------------|---------------------|
| RF transmission rate: | 1.5 Mb/s |
| Throughput: | 935 Kb/s |
| Radio channels: | 12 Non-overlapping |
| Frequency select: | Automatic or manual |

Range Option

| | Line of Sight | Up to 3 Trees |
|---|---------------|---------------|
| Standard package, 2.5dBi antennas on the housing and receiver | 1 Mile | 500 feet |
| w/optional 11db antenna on receiver | 2 miles | 1000 feet |
| w/optional (2) 11db antennas on the housing and receiver | 10 miles | 2500 feet |

Shipping Specifications

| Model | Shipping Weight | Box Dimensions |
|-------|-----------------|----------------|
| FDW7 | 11 lbs | 17 x 14 x 17 |
| FDP7 | 11 lbs | 17 x 14 x 14 |